


SPLIT MURO **INVERTER T-PRO**

Potencias: 9.000 / 12.000 / 18.000 / 24.000 BTU/hr.

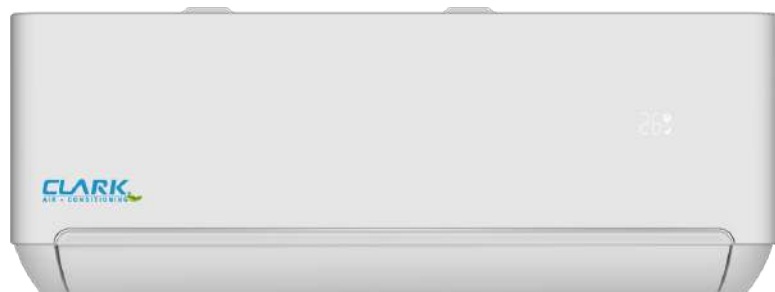

MODELO			SPL-INV-CTP09K	SPL-INV-CTP12K	SPL-INV-CTP18K	SPL-INV-CTP24K
Voltaje, Fase y Frecuencia			220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P	220-240V~/50Hz/1P
Capacidad de enfriamiento nominal	Btu/h		9000(2047~10236)	12000(2730~12215)	18000(4094~18425)	24000(5118~24400)
	W		2638(600~3000)	3517(800~3580)	5275(1200~5400)	7034(1500~7150)
Capacidad de calefacción nominal	Btu/h		9000(2047~10557)	12000(2730~12283)	18000(4094~19107)	24000(5118~24600)
	W		2638(600~3100)	3517(800~3600)	5275(1200~5600)	7034(1500~7210)
EER En frio	Btu/h.w;		3,23	3,22	3,22	3,21
COP En Calor	W/W		3,61	3,62	3,61	3,61
Eliminación de humedad	Liters/h		1,0	1,3	1,8	2,2
Nivel de ruido interior en refrigeración	High	dB(A)	42	42	45	50
	Med.	dB(A)	39	39	42	47
	Low	dB(A)	36	36	39	44
Nivel de ruido exterior	dB(A)		52	52	55	56
Datos eléctricos						
Rango de Voltaje	V		165~265	165~265	165~265	165~265
Corriente nominal	Cooling	A	3.8(1.4~9.0)	5.1(1.4~9.0)	7.8(1.4~12.0)	10.5(1.4~12.0)
	Heating	A	3.4(1.4~10.0)	4.5(1.4~10.0)	7.0(1.4~13.0)	9.3(1.4~13.0)
Entrada nominal	Cooling	W	816(300~2200)	1092(300~2200)	1638(300~2500)	2190(300~2600)
	Heating	W	730(300~2200)	971(300~2200)	1461(300~2300)	1948(300~2600)
Corriente Maxima	A		9.0/10.0	9.0/10.0	12.0/13.0	12.0/13.0
Maximo de entrada	W		2200/2200	2200/2200	2500/2300	2600/2600
Tipo de Refrigerante/Carga	Gram		R410A/660g	R410A/630g	R410A/1310g	R410A/1310g
Compressor	Type		Rotary	Rotary	Rotary	Rotary
Fan System						
Caudal de aire Cooling/heating	m³/h		480/520	600/580	800/800	1100/1150
Tuberías	Gas	Pulgadas	Φ9.52 (3/8")	Φ9.52 (3/8")	Φ9.52 (3/8")	Φ12(1/2")
	Líquido	Pulgadas	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")
Dimensiones Netas	Interior	mm	790×275×192	790×275×192	920×306×195	1100×333×222
	Exterior	mm	777×290×498	777×290×498	853×349×602	920×380×699
Peso Neto	Interior	kg	8,5	8,5	10	14
	Exterior	kg	21,5	21,5	31,5	37,5
Dimensiones Empaque	Interior	mm	860×345×265	860×345×265	990×380×265	1165×405×295
	Exterior	mm	818×325×520	818×325×520	890×385×628	960×430×732
Peso Neto	Interior	kg	10,5	10,5	13	17
	Exterior	kg	24,5	24,5	35	41

* Estos valores son referenciales y sujetos a cambio.

* Cualquier duda o para mayor información contactar a su ejecutivo.